



hotion.com

Ovation[®]
-by **Hotion**

PRODUCTS

QUICK GUIDE



@ovationlight

Theatrical & studio

Art gallery lights

Architectural lights

Professional stage

VOL.6.3

New



Scan for details



CTC 100 Profile

- 100W dual white profile spot
- 4 shuttuers for framing
- 2700K - 6500K CCT
- High CRI of 96
- Manual zoom
- Knob control
- Super compact size


COB
100W LED

2700K - 6500K

Flicker Free

Zoom

New

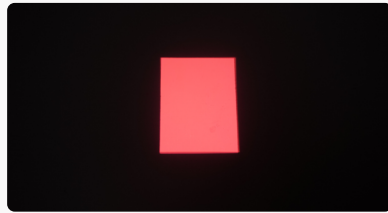

Honor 100C Zoom

- 100W RGBL LED profile spot
- 4 shuttuers for framing
- 15°-30°/25°-50° manual zoom
- High CRI of 96
- Knob control
- Super compact size

COB
100W LED

DMX
RDM

Zoom

New



Scan for details



CTC 100 Fresnel

- 100W dual white fresnel zoom
- 100W WW + 100W CW
- 2700K - 6500K CCT
- High CRI of 96
- Manual zoom
- Knob control
- Super compact size

COB
100W LED

2700K - 6500K

Flicker Free

Zoom

New



Honor 100C Fresnel

- 100W RGBL LED fresnel zoom
- 18°-65° zoom lens
- Powercon TR1 in
- Manual zoom
- Knob control
- only 2.5 kg, easy to install

COB
100W LED

DMX
RDM

Zoom

RGBL LED



Scan for details



Scan for video

New



Scan for details

New



Scan for details



Scan for video

New



Reborn 200

- S4 LED retrofit single white
- HPL 575 equivalent
- 3200K, 4000K, 5600K opt.
- High CRI, TLCI, CQS
- 100 - 240V support
- XLR signal connection
- Easy to setup and install



LED technology



LCD display



Flicker Free

98

CRI

Reborn 200T

- S4 LED retrofit tunable white
- HPL 575 equivalent
- 2200K - 7000K dual white CCT
- High CRI, TLCI, CQS
- 100 - 240V support
- XLR signal connection
- Easy to setup and install



LED technology



2200K - 7000K



Flicker Free

94

CRI

Reborn 1000C

- S4 LED retrofit RGBV
- 1000W LED source
- RGBV color mixing(V=WW)
- Each color 250W output
- 100 - 240V support
- XLR signal connection
- Easy to setup and install



LED technology



RGBV LED



Flicker Free

DMX

DMX control

Panto Leko 60

- 60W LED profile zoom IP65
- 2700K - 6000K dual white
- Zoom 15 - 30°, 25 - 50° opt.
- DMX, RDM control
- High CRI ≥ 92
- IP 65 rated, outdoor available
- E-sized gobo holder



2700K - 6000K



IP65



Fan-free

92

CRI



Mini Leko 20

- 20W LED profile spot
- 3200K, 4000K or 5600K color temp
- High CRI of 92
- Aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens opt.
- DMX control
- Black or white body

20W

COB LED


DMX

DMX control

Flicker Free

92

CRI

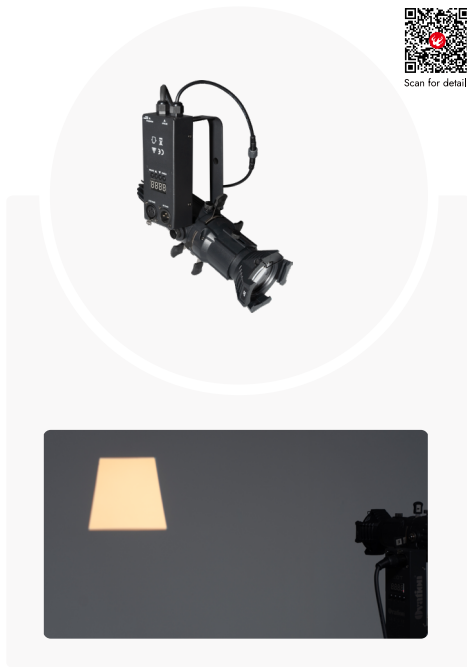

S20T

- 20W tunable LED profile spot
- 2700K - 6000K CCT
- High CRI over 92
- Aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens opt.
- DMX control
- Black or white body

2700K - 6000K

DMX

DMX control

Flicker Free

92

CRI



X40

- 40W LED profile spot
- 3200K, 4000K or 5600K color temp
- High CRI of 92
- Aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens opt.
- E-sized gobo holder
- Black or white body

40W

COB LED

DMX

DMX control

Fan-free

92

CRI



X40T

- 40W tunable LED profile spot
- 2700K - 6000K CCT
- High CRI of 92
- Aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens opt.
- E-sized gobo holder
- Black or white body

COB

40W LED

2700K - 6000K

Flicker Free

92

CRI



Scan for details



Scan for video



Mini Profile 40Z

- 40W LED profile spot zoom
- 3200K, 4000K, 5600K opt.
- High CRI of 92
- Aluminum housing, fan-free
- 15° - 30° manual zoom lens
- Black or white body
- Track mount version opt.

40W

COB LED

DMX

DMX control




Flicker Free

92

CRI



Scan for details

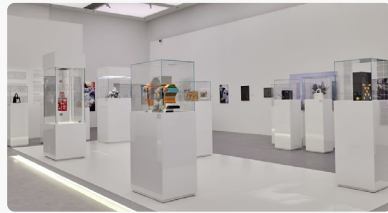

S40T

- 40W LED profile spot zoom
- 2700K - 6000K CCT
- High CRI of 92
- Aluminum housing, fan-free
- 15° - 30° manual zoom lens
- Black or white body
- Track mount version opt.



2700K - 6000K

DMX

DMX control



Flicker Free

92

CRI



New



Scan for details



Gallery 50 Spot

- 40W LED profile spot zoom
- 2700K - 6000K CCT
- Single white / RGBW optional
- 25° - 40°, 50° - 60° manual zoom
- High CRI over 92
- Four shutters control light shape
- black or white body
- DMX, RDM support
- HD optics



LED technology

92

CRI



Flicker Free

DMX

DMX control



New



Scan for details



Artisan 40T HD

- 40W WW + 40W CW constant output LED
- 2700K - 6000K adjustable
- High CRI over 92
- DMX built-in
- HD zoom lens, 25° - 40° zoom lens
- 50° - 60° zoom lens optional
- Wireless DMX function
- Track version optional



LED technology

92



CRI



Flicker Free

DMX

DMX control

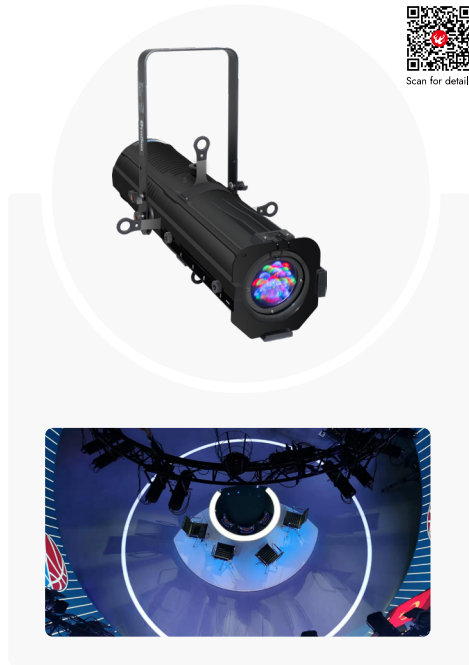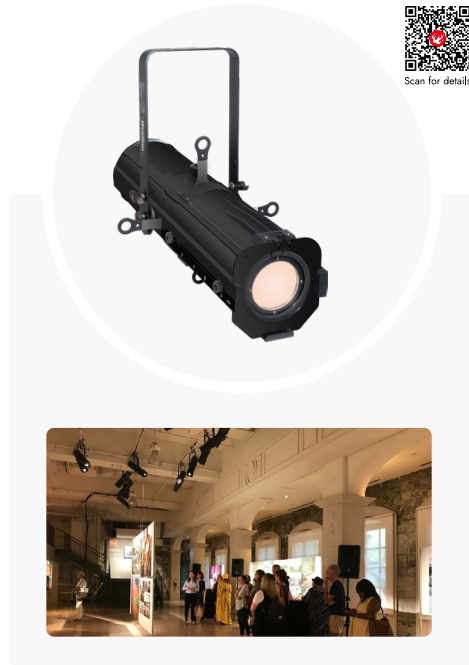

Honor 250C Zoom

- 250W RGBW LED profile spot
- RGBW color mixing
- 18° - 38° manual zoom
- 3000K - 8000K CCT
- Dimmer frequency
- Dimmer curves
- Smart fan, silent



Honor 300 Zoom

- 300W white LED profile spot
- 3200K or 5600K opt.
- 18° - 38° manual zoom
- 1KW tungsten equivalent
- High CRI 97, TLCI 98
- Dimmer curves, frequency
- Smart fan, silent



CTC 300 Profile


- 300W dual white LED profile
- 2800K - 6500K CCT
- 18° - 38° manual zoom
- HD optics
- High CRI 96, TLCI 98
- Dimmer curves, frequency
- Smart fan, silent operation



Honor 350C Zoom

- 350W RGBALC LED profile
- RGBALC color mixing
- High CRI 95, TLCI 98
- 18° - 38° manual zoom
- 2700K - 8000K CCT
- Dimmer curves, frequency
- Smart fan, silent



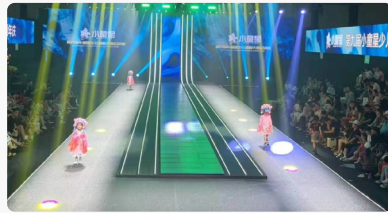

Profile S250C

- 250W RGBW LED profile spot
- RGBW color mixing
- 19°, 26°, 36°, 50° lens opt.
- 3000K - 8000K CCT
- Dimmer frequency
- Dimmer curves
- Smart fan, silent



Profile S300

- 300W white LED profile spot
- 3200K or 5600K opt.
- 19°, 26°, 36°, 50° lens opt.
- 1KW tungsten equivalent
- High CRI 97, TLCI 98
- Dimmer curves, frequency
- Smart fan, silent



Profile S300T

- 300W dual white LED profile
- 2800K - 6500K CCT
- 19°, 26°, 36°, 50° lens opt.
- HD optics
- High CRI 96, TLCI 98
- Dimmer curves, frequency
- Smart fan, silent operation



Profile S350C

- 350W RGBALC LED profile
- RGBALC color mixing
- High CRI 95, TLCI 98
- 19°, 26°, 36°, 50° lens opt.
- 2700K - 8000K CCT
- Dimmer curves, frequency
- Smart fan, silent





Mini Fresnel 50T

- 50W fresnel tunable white
- 2700K - 6500K CCT
- CRI 95, R9≥90, TLCI 98
- 25° - 80° manual zoom
- Super compact, easy for set up
- Rotary, key, DMX control
- 4-leaf rotatable barndoor




Mini Fresnel 40C

- 40W LED fresnel zoom
- RGBW color mixing
- 40Watt for each color
- 25° - 80° manual zoom
- Super compact, easy for set up
- Rotary, key, DMX control
- 4-leaf rotatable barndoor





New

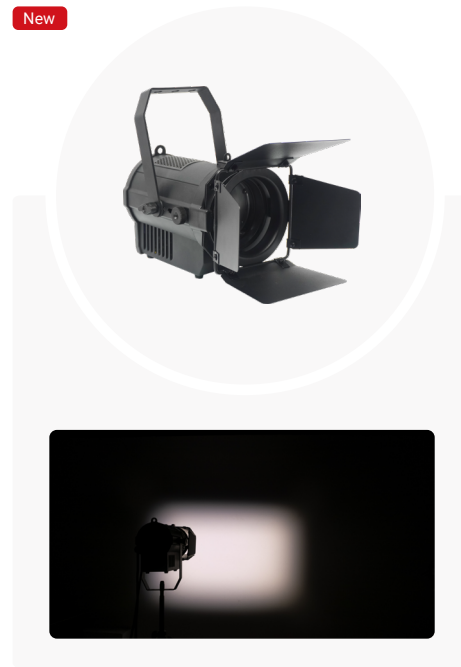

Event 120T

- 100W fresnel tunable white
- 2700K - 6500K CCT
- CRI 95, R9≥90, TLCI 98
- 25° - 80° manual zoom
- Super compact, easy for set up
- Rotary, key, DMX control
- 4-leaf rotatable barndoor

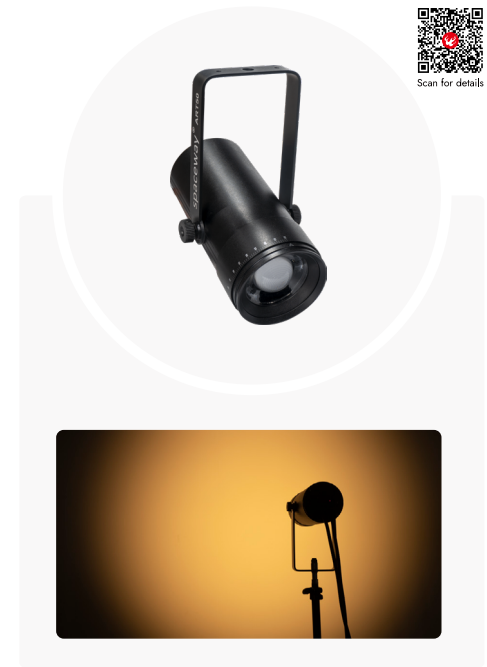

Art 50 Wash

- 40W LED fresnel zoom
- 2700K - 6000K CCT
- 10° - 60° manual zoom
- High CRI over 92
- Aluminum housing
- black or white body
- DMX, RDM support



New



Scan for details



Scan for video



Event 100T

- 100Watt tunable white fresnel
- 2700K - 6000K CCT
- 25° - 65° manual zoom
- Average CRI 95, TLCI 97
- Super compact size
- Barndoor included
- Rotary control dimmer, CCT



2700K - 6000K



Zoom

95

CRI

97

TLCI

New



Scan for details



Scan for video



Event 200T

- 200Watt tunable white fresnel
- 2700K - 6000K CCT
- 25° - 65° manual zoom
- Average CRI 95, TLCI 97
- Super compact size
- Barndoor included
- Rotary control dimmer, CCT



2700K - 6000K



Zoom

95

CRI

97

TLCI



Scan for details



Scan for video



Pioneer 100 Zoom

- 100W fresnel single white
- 3200K or 5600K CCT
- CRI 97, R9≥90, TLCI 98
- 25° - 65° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Barndoor included



COB
100W LED



Zoom

97

CRI




Silent



Scan for details



Scan for video

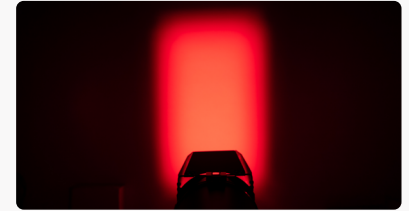

Pioneer 100C Zoom

- 100W LED fresnel RGBW
- RGBW color mixing
- Soft and even wash effect
- 25° - 65° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Barndoor included



RGBW LED



Zoom



Flicker Free



Silent



Pioneer 100T Zoom

- 100W fresnel single white
- 2700K - 6000K CCT
- CRI 97, R9≥90, TLCI 98
- 25° - 65° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Barndoor included



Pioneer 200 Zoom

- 200W fresnel single white
- 3200K or 5600K CCT
- CRI 97, R9≥90, TLCI 98
- 15° - 60° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Barndoor included



Pioneer 200C Zoom



- 200W LED fresnel RGBW
- RGBW color mixing
- Soft and even wash effect
- 15° - 60° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Barndoor included



Pioneer 200T Pro

- 200W LED fresnel tunable white
- Smaller but brighter than Pioneer 200
- 2700K - 6500K CCT
- Average CRI 97, TLCI 98
- Soft and even wash effect
- 10 - 55° motorized zoom



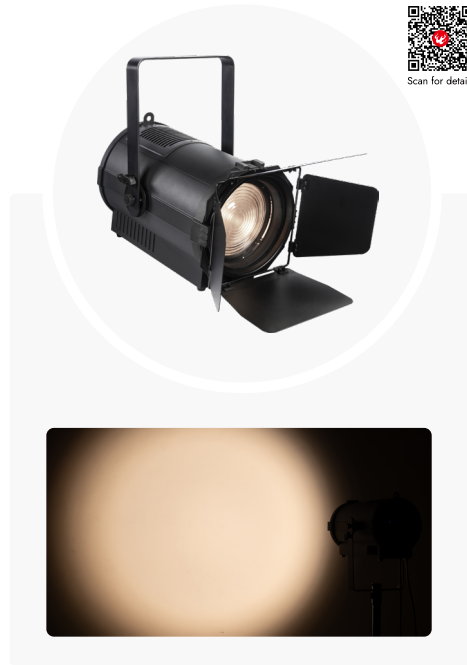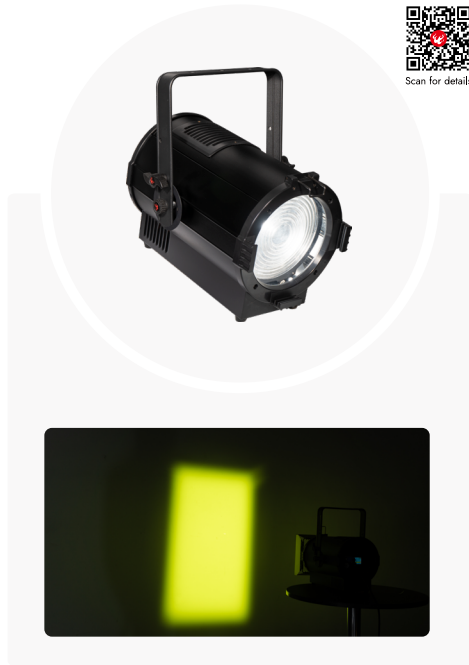

Pioneer 200C Pro

- 200W LED fresnel RGBALC
- RGBALC color mixing
- Soft and even wash effect
- CRI≥95(CT channel), 85(full on)
- Soft and even wash effect
- 10 - 55° motorized zoom
- Video flicker free



Pioneer 300 Zoom

- 300W LED fresnel single white
- 3200K or 5600K CCT
- CRI 97, R9≥90, TLCI 98
- 8° - 60° motorized zoom
- 3 + 5pin DMX, RDM support
- Super bright output
- Barndoor included



CTC 300 Fresnel

- 300W LED fresnel tunable white
- 2800K - 6500K CCT
- Soft and even wash effect
- High CRI 98, TLCI 98
- Soft and even wash effect
- 8° - 60° motorized zoom
- Video flicker free



Pioneer 350C Zoom

- 350W LED fresnel RGBALC
- RGBALC color mixing
- Soft and even wash effect
- High CRI 95, TLCI 98
- Soft and even wash effect
- 20 - 55° motorized zoom
- Video flicker free





Solar Panel 150T

- 150Watt LED studio panel
- 3200K - 5600K CCT
- Super bright, uniform coverage
- Super silent operation
- High CRI 98, TLCI 98
- Rotary, DMX, RDM control
- 8 - leaf barn door



8-leaf barndoor



3200K - 5600K



Flicker Free

98

TLCI

Solar Panel 200

- 200Watt LED studio panel
- 3200K or 5600K color temp
- Super bright, uniform coverage
- Super silent operation
- High CRI 95, TLCI 98
- Rotary, DMX, RDM control
- 8 - leaf barn door



8-leaf barndoor



3200K or 5600K



Flicker Free

98

TLCI

Solar Panel 300T

- 300Watt LED studio panel
- 3200K - 5600K CCT
- Super bright, uniform coverage
- Super silent operation
- High CRI 98, TLCI 98
- Rotary, DMX, RDM control
- 8 - leaf barn door



COB
300W LED



2800K - 6500K



Zoom



Flicker Free

Solar Panel 300C

- 300W LED studio panel RGBWW
- 2800K - 8000K CCT
- Uniform coverage
- Turbo mode available
- High CRI 95, TLCI 98
- Rotary, DMX, RDM control
- 8 - leaf barn door



8-leaf barndoor



RGBWW




2800K - 8000K

98

TLCI



Scan for details

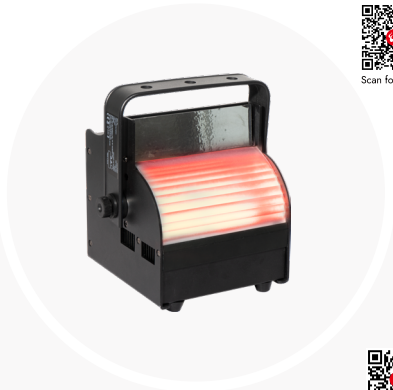

Scan for details



Scan for video

New




Scan for details

New



Scan for details

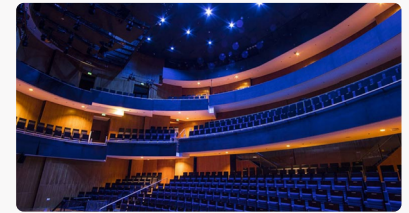

Solar CYC

- 175Watt LED cyclorama
- 3200K or 5600K color temp
- Super bright, uniform coverage
- CRI 98, R9≥93, TLCI 98
- Flicker free operation
- PWM 1.2 - 20 KHz
- Super silent operation



98
TLCI

CYC RGBW

- 175Watt LED cyclorama
- RGBW color mixing
- Super bright, uniform coverage
- DMX RDM protocols
- Flicker free operation
- PWM 1.2 - 20 KHz
- Super silent operation



2.7
Compact

Atmos 100T

- 100W dual white down light
- 150W optional
- 2700K - 6900K CCT
- Uniform coverage
- Fan-free design
- High CRI 96, TLCI 98
- Dimmer curves selectable
- Smooth dimming, flicker free
- Downlight or fresnel



Atmos 150C

- 150W RGBAL down light
- RGBW optional
- Uniform coverage
- Fan-free design
- Aluminum housing
- Dimmer curves selectable
- Smooth dimming, flicker free
- Downlight or fresnel





Scan for details



Scan for details



Chinlite 5600


- LED chin light
- 5600K color temperature
- High CRI, TLCI, CQS
- Beehive diffuser available
- 0 - 100% smooth dimming
- 1 controller control 4 lights
- DMX, manual control

Blinder 400

- 4 x 100W LED, high brightness
- Individual control of each LED
- 3200K - 5600K tunable, single white optional
- Flicker free
- Aluminum housing
- 2 eye blinder available



Scan for details

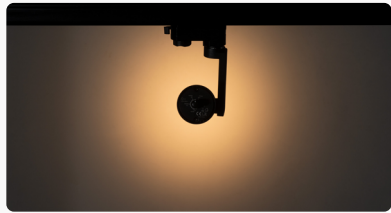

Showgun 10

- 10W LED track spot light
- 2700K - 6000K CCT
- High CRI of 96
- Aluminum housing, fan-free
- 10° - 60° manual zoom
- 4 wire track adapter
- Black or white body

COB
10W LED

2700K - 6000K

Flicker Free

Track
3 circuits



Scan for details



Showgun 20

- 20W LED track spot light
- 2700K - 6000K CCT
- High CRI of 96
- Aluminum housing, fan-free
- 10° - 60° manual zoom
- 4 wire track adapter
- Black or white body

COB
20W LED

2700K - 6000K

Flicker Free

Track
3 circuits



Scan for details



Showgun 35

- 35W LED track spot light
- 2700K - 6000K CCT
- High CRI of 96
- Aluminum housing, fan-free
- 10° - 60° manual zoom
- 4 wire track adapter
- Black or white body

COB
35W LED

2700K - 6000K

Flicker Free





Track
3 circuits

New



IG 1060

- 40W tunable white LED
- Pan: 270°
- Tilt: 270°
- Moto zoom 10° - 60°

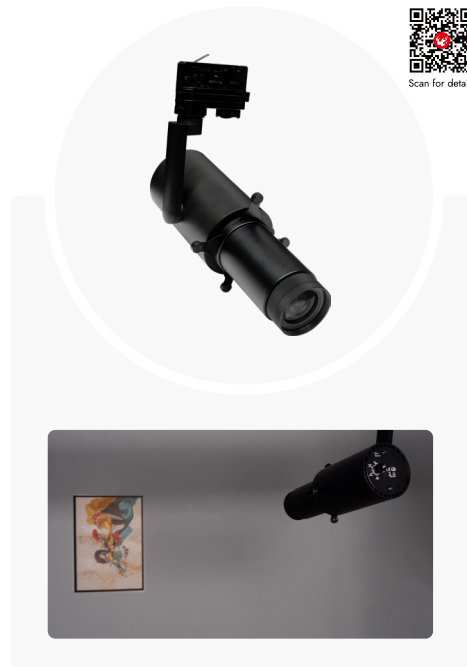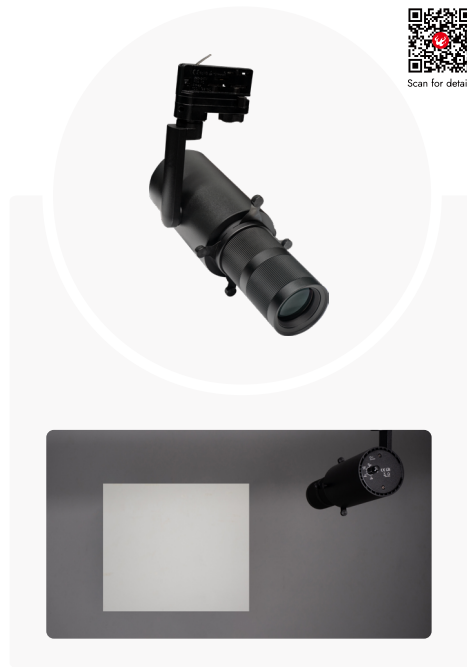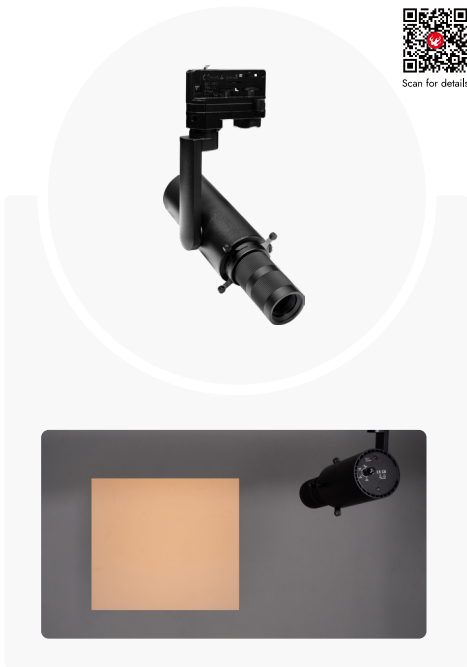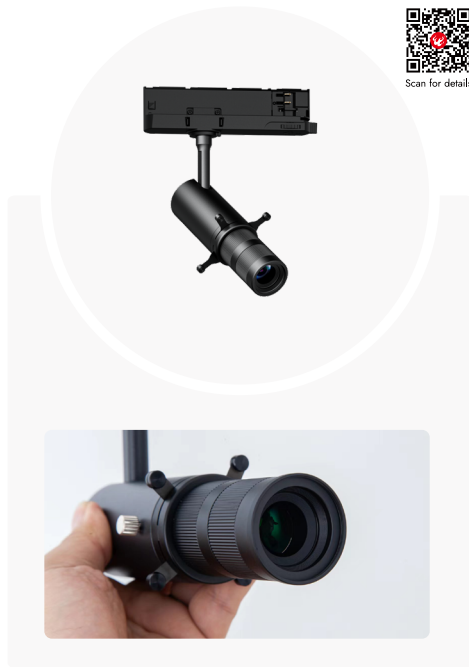

Spacegun Spot 2035

- 10W white framing track
- 4 shuttuers for framing
- Camera lens style zoom
- 3000K, 4000K or 5600K
- High CRI of 95
- 20° - 35° zoom lens
- Black or white body

COB
10W LED



Track
3 circuits

Showgun Spot 2035

- 10W dual white framing track
- 4 shuttuers for framing
- Camera lens style zoom
- 2700K - 6000K CCT
- High CRI of 95
- 20° - 35° zoom lens
- Black or white body

COB
20W LED



Track
3 circuits

Showgun Spot 2540

- 30W dual white framing track
- 4 shuttuers for framing
- Camera lens style zoom
- 2700K - 6000K CCT
- High CRI of 95
- 25° - 40° zoom lens
- Black or white body

COB
30W LED



Track
3 circuits

Showgun Spot 5060

- 35W dual white framing track
- 4 shuttuers for framing
- Camera lens style zoom
- 2700K - 6000K CCT
- High CRI of 95
- 50° - 60° zoom lens
- Black or white body

COB
35W LED



Track
3 circuits



Hero 300 Super Beam

- 80W LED moving head beam
- Super bright optical system
- 2 degree beam angle
- 1 Color wheel with 10 colors+open
- 1 Gobo wheel with 13 fixed gobo+open
- 1 effect color wheel




Hero 300 Spot

- 200W LED moving head spot
- 7° - 20° motorized zoom
- 1 Color wheel with 9 colors + open
- 1 Gobo wheel with 9 fixed gobo + open
- 1 Gobo wheel with 7 rotating gobo + open
- 3 facet circular rotating indexable prism




Hero 300 Performance

- 300W LED moving head performance
- Spot, Wash, Animation effect all-in-one
- 1 Animation wheel, 3 - facet prism
- 1 Color wheel with 7 colors + open
- 1 Gobo wheel with 8 fixed gobo + open
- 1 Gobo wheel with 7 rotating gobo + open

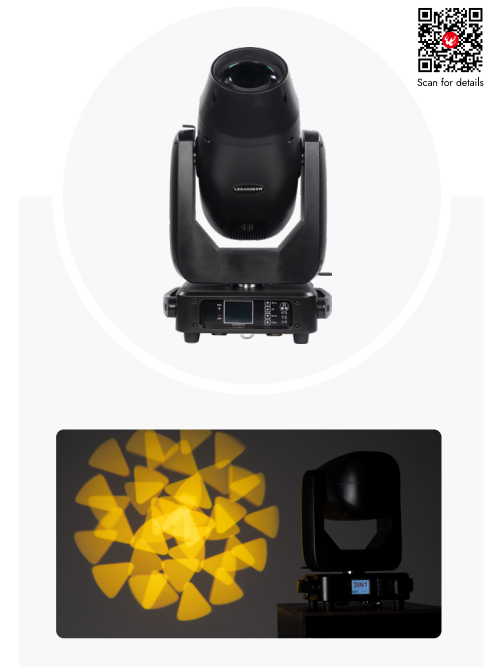

Hero 400 BSW

- 400W LED moving head Beam Spot Wash
- 4° - 35° moto zoom (spot mode)
- 1 color wheel with 8 colors
- 1 static gobo wheel with 12 gobos
- 1 rotating gobo wheel with 7 gobos
- 1 animation wheel
- CMY + CTO...

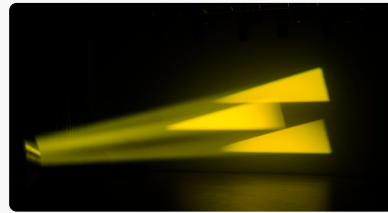

Hero 400 Framing

- 400Watt LED moving head framing
- 6000K LED
- CRI, TLCI up to 95
- 1 color wheel with 6 colors + CTO
- Auto framing
- Motorized zoom
- Double frost effect (Heavy frost + light frost)

Hero 700 Framing

- 700Watt LED moving head framing
- 1 rotating gobo wheel with 7 rotating gobos
- 1 fixed gobo wheel with 15 gobos, variable speed jitter/bidirectional rotation
- 1 dynamic fire plate, reversible and 360 degree infinite rotation
- 5.5° - 50° linear high-speed zoom

C19

- 19 x 15Watt RGBW LED beam wash
- Flat and even RGBW color mixing
- Motorized zoom 8° - 50°
- DMX, Auto, Master-slave, Sound control
- Pan 540°, Tilt 270°, accurate positioning
- Rapid pan & tilt movement
- 10/15/21/37 DMX channels

B19

- 19 x 15Watt LED beam, wash and kaleido effects
- Individual control of each LEDs, honeycomb designed lens
- Rotating front lens without limitation for vortex effects
- Operating modes: wash, beam, FX effects
- Motorized zoom range from 4° - 60°
- Powercon in & out



Scan for details



Scan for details



New



New



Scan for video



Scan for video



Mainforce 740

- 7 x 40W RGBW LED moving head beam wash
- 5° - 50° motorized zoom
- Accurate positioning, auto correction
- Compact body, light weight
- PowerCon in & out connection
- Available in pixel and non pixel control

Mainforce 1240

- 12 x 40W RGBW LED moving head beam wash
- Color macros function
- LED rainbow effect
- Strong beam effect, flat and nice wash effect
- Individual control of each LED
- 8° - 50° motorized zoom
- Super fast head moving

Topaz 2000

- 100W LED source
- RGBW color mixing
- Motorized zoom
- super compact size
- Even color mixing

Froggy 20

- 10W RGBW 4in1 LED
- Beam angle: 5°
- Pan: 540°
- Tilt: 270°
- 3450 LUX@5 meters distance
- Super compact size



Scan for details



Mainforce 1940

- 19 x 40W LED moving beam wash
- RGBW 4in1 color mixing
- Individual control of each LEDs
- 4° - 60° moto zoom
- Rotating front lens without limitation for vortex effects
- Operating modes: wash, beam, FX effects



Scan for details



P19

- 19 x 15W LED zoom par
- RGBW LED color mixing
- Motorized zoom from 15° - 60°
- 3 separate LED zones controllable
- Auto, master-slave, sound activate
- 5/10/16/32 DMX channels
- Powercon in & out connection



Scan for details



POP 1018

- 18 x 10W LED par light
- RGBWA+UV 6 in 1 color mixing
- Various built-in color marcos
- DMX, auto, sound control
- Master-slave operation
- Aluminum housing
- RGBW or RGBWA version selectable



Scan for details




POP 354


- 54 x 3W LED par light
- RGBW(12R, 18G, 18B, 6W) LED
- Master-slave operation
- Aluminum housing
- Overheat protection
- IP 20 indoor use
- Built-in color marcos



Scan for details

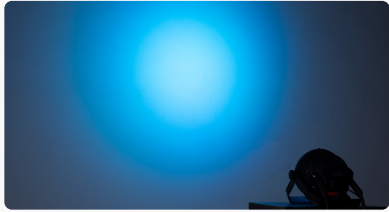

Scan for details

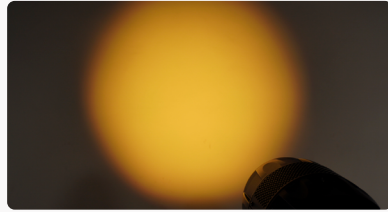

Scan for details



Scan for details



EXT 1218

- 18 x 12W LED par IP rated
- RGBW 4in1 color mixing
- Master-slave operation
- 25°, 45° lens optional
- Overheat protection
- Built-in color Marcos
- IP65 rated, outdoor use

P740 (EXT 740)

- 7 x 40W RGBW LED zoom par IP rated
- High efficient optical lens
- Strong beam effect, flat and nice wash effect
- 5° - 45° motorized zoom range
- IP rated powerCon in & out connectors
- Die-casting aluminium body, compact design
- IP 65 rated, outdoor use

Power par 350

- 31 x 10W LED power par
- Super bright output, designed for auto show
- Long distance throw
- Video flicker free
- HQ LEDs, long life time
- Die-cast aluminum body
- Available in tunable white or RGBW version

Pop Par 100 UV

- 100W UV par light
- 100° wide beam angle
- Master-slave operation
- Aluminum housing
- Anti-corrosive coating
- Overheat protection
- RDM function



Scan for details



Scan for details



Scan for details



Scan for details



Strobe 1000 RGB

- 200W RGB LED strobe
- 1000 pcs SMD LEDs
- Even color mixing, bright output
- Strobe, Blinder, Wash all in one
- Aluminum housing
- Segment control

Strom 3000 RGBW



- LED strobe light IP rated
- Strobe, Blinder, Wash all in one
- 1320pcs RGBW 4in1 LED
- DMX, Auto, Sound control
- 1-30 times/second strobe
- Segment control

Batt Par Q6

- 6pcs RGBWA-UV LED battery par
- Compact, easy for set up
- Onboard 2.4G wireless DMX
- App available in IOS and Android phone
- IR control available
- Rechargeable, Li-ion battery
- Black and white housing selectable

Spark C600

- 600Watt cold spark machine
- Light weight only 4.9kg
- Safe, no gunpowder and smoke
- DMX 512, remote control
- Easy to setup and install
- Aluminum housing
- PowerCon in & out

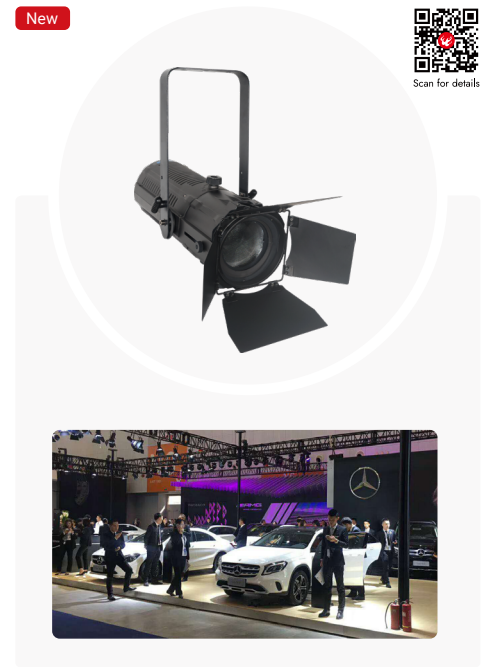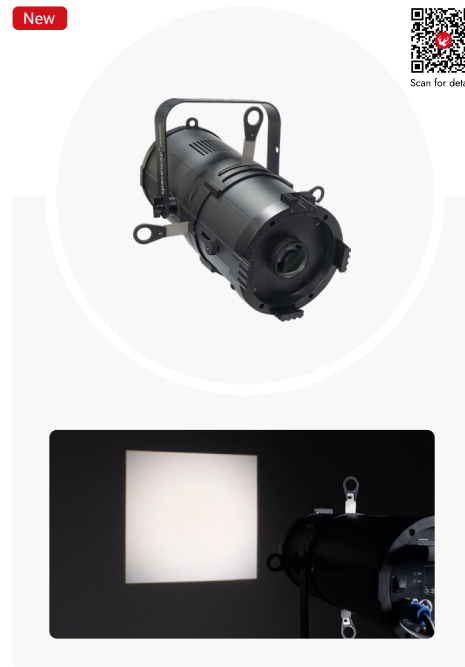

RDM DMX SP8

- 8 optically isolated XLR(Neutrik) plugs for DMX output
- 2 Neutrik XLR (3-pin) for DMX input
- Variable data routing capabilities for all DMX outputs
- Serial connection possible
- LED indication for functions
- DMX Splitter / DMX booster operation possible
- DMX / RDM protocol...

ArtNet DMX AD8

- RJ45 Ethernet (LAN) interface, 10/100M/1000M self-adaptive, support TCP/IP protocol
- Network interface supports port auto-inversion (Auto MDI/MDIX)
- Support DMX-512 and ArtNet protocol, rdm protocol
- Support ArtNet to DMX signal bi-directional conversion
- DMX input / output can be enabled / disabled
- Each DMX output port can be set to single, zero, HTP, LTPRDM five modes...

UHD 200

- 200W dual white LED profile
- 2800K - 6500K CCT
- 30° or 60° fixed lens
- UHD optics, no lens distortion
- Gobo holder available
- Dimmer curves, frequency
- 300W version optional



New



Scan for details



Reborn 200 Par

- Par light for Reborn 200
- Replacement for S4 par
- Single white or dual white optional
- High CRI
- Fixed angle
- Compact size



LED technology









LCD display



Flicker Free



DMX control

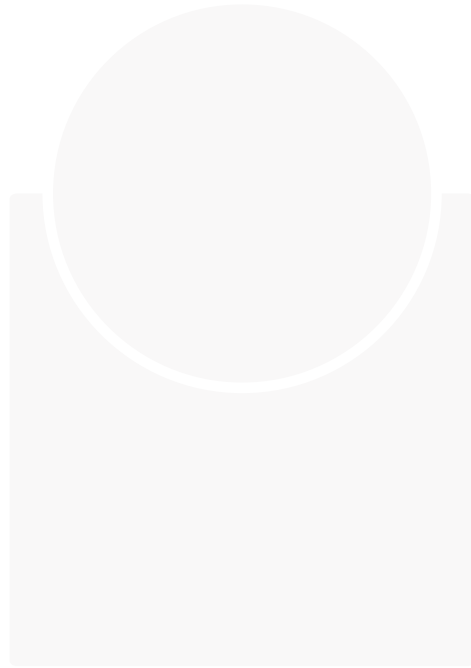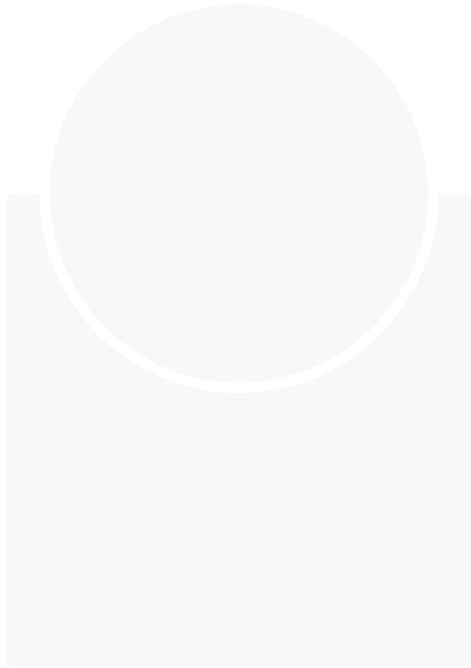

用心造好灯

Professional theatre, studio, gallery lights manufacture

Hotion® **Ovation®**



Download latest catalog

Stay Social !



Instagram
[@ovationlight](#)



Twitter
[@ovationlight](#)



Facebook
[@ovationlighting](#)



Youtube

Guangzhou Hotion Technology Co., Ltd

Building 29, Meidong Industrial Park, Huadu District, Guangzhou, China (510880)

T: +86 020 86847336 | E: info@hotion.com | www.hotion.com

© Copyright by Hotion. All rights reserved.

All specifications are subject to change without prior notice. V6.3