



hotion.com

Ovation[®]
-by **Hotion**

PRODUCTS

QUICK GUIDE



@ovationlight

Theatrical & studio

Art gallery lights

Architectural lights


Professional stage

VOL.6

New



Scan for details

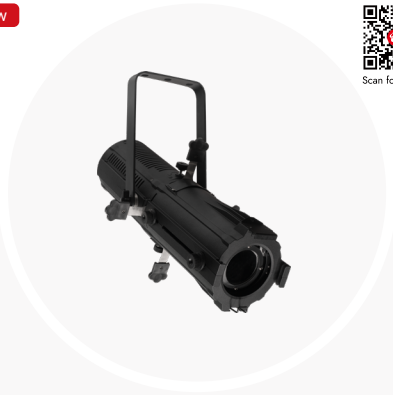

CTC 100 Profile

- 100W dual white profile spot
- 4 shuttuers for framing
- 2700K - 6500K CCT
- High CRI of 96
- Manual zoom
- Knob control
- Super compact size

COB
100W LED

2700K - 6500K



Flicker Free

Zoom

New



Scan for details

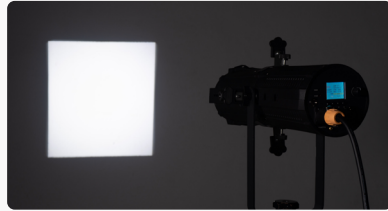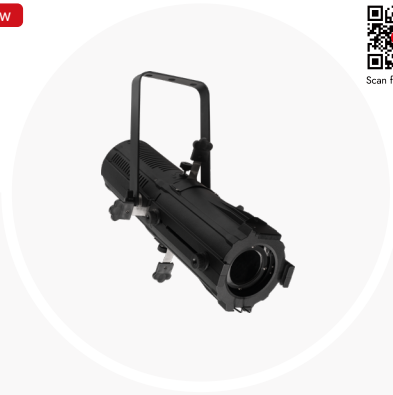

Honor 100 Zoom

- 100W single white profile spot
- 4 shuttuers for framing
- 3200K or 5600K
- High CRI of 96
- Manual zoom
- Knob control
- Super compact size

COB
100W LED

DMX
RDM


Zoom

96
CRI

New



Scan for details

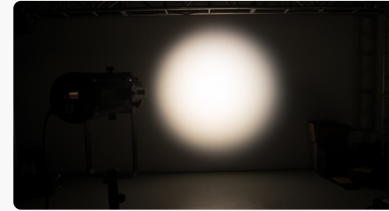

CTC 100 Fresnel

- 100W dual white fresnel zoom
- 100W WW + 100W CW
- 2700K - 6500K CCT
- High CRI of 96
- Manual zoom
- Knob control
- Super compact size

COB
100W LED

2700K - 6500K

Flicker Free

Zoom

New



Scan for details



Honor 100 Fresnel


- 100W single white fresnel zoom
- 3200K or 5600K
- High CRI of 96
- Manual zoom
- Knob control
- Super compact size

COB
100W LED

DMX
RDM


Zoom

98
CRI

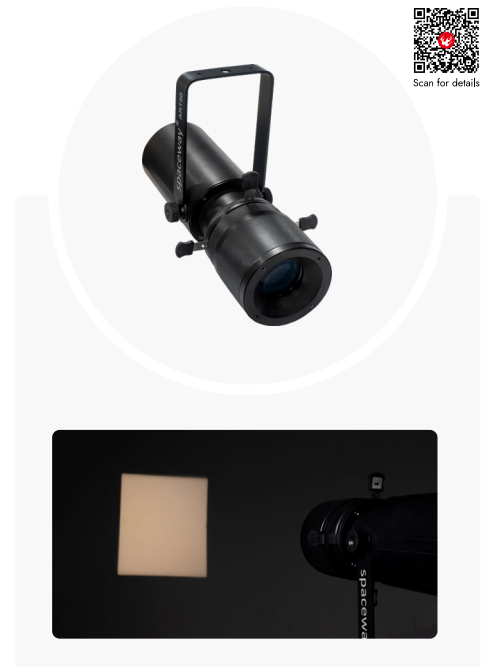

Reborn 200

- S4 LED retrofit single white
- HPL 575 equivalent
- 3200K, 4000K, 5600K opt.
- High CRI, TLCI, CQS
- 100 - 240V support
- XLR signal connection
- Easy to setup and install



Reborn 200T

- S4 LED retrofit tunable white
- HPL 575 equivalent
- 2200K - 7000K dual white CCT
- High CRI, TLCI, CQS
- 100 - 240V support
- XLR signal connection
- Easy to setup and install



Panto Leko 60



- 60W LED profile zoom IP65
- 2700K - 6000K dual white
- Zoom 15 - 30°, 25 - 50° opt.
- DMX, RDM control
- High CRI ≥ 92
- IP 65 rated, outdoor available
- E-sized gobo holder




Art 50 Spot

- 40W LED profile spot zoom
- 2700K - 6000K CCT
- 15° - 30° manual zoom
- High CRI over 92
- Four shutters control light shape
- black or white body
- DMX, RDM support



Scan for details








Scan for details



Scan for video

Scan for details





Scan for details



Scan for video



UHD 60

- 40W LED shapeable light
- 5600K color temperature
- Four shutters control light shape
- High CRI of 92
- 60° fixed lens, UHD optics
- No lens distortion
- DMX, RDM control

CW

5600K



No Lens Distortion



Flicker Free

92

CRI

Mini Leko 20

- 20W LED profile spot
- 3200K, 4000K or 5600K color temp
- High CRI of 92
- Aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens opt.
- DMX control
- Black or white body

20W

COB LED

DMX

DMX control



Flicker Free

92

CRI

S20T

- 20W tunable LED profile spot
- 2700K - 6000K CCT
- High CRI over 92
- Aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens opt.
- DMX control
- Black or white body



2700K - 6000K

DMX

DMX control



Flicker Free

92

CRI

X40

- 40W LED profile spot
- 3200K, 4000K or 5600K color temp
- High CRI of 92
- Aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens opt.
- E-sized gobo holder
- Black or white body

40W

COB LED

DMX

DMX control



Fan-free

92

CRI



Scan for details



Scan for details





Scan for video



Scan for details



Scan for details

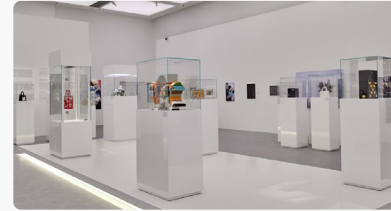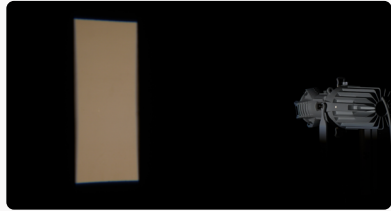

X40T

- 40W tunable LED profile spot
- 2700K - 6000K CCT
- High CRI of 92
- Aluminum housing, fan-free
- 19°, 26°, 36°, 50° lens opt.
- E-sized gobo holder
- Black or white body

COB
40W LED

2700K - 6000K

Flicker Free

92
CRI

Mini Profile 40Z

- 40W LED profile spot zoom
- 3200K, 4000K, 5600K opt.
- High CRI of 92
- Aluminum housing, fan-free
- 15° - 30° manual zoom lens
- Black or white body
- Track mount version opt.

40W
COB LED

DMX
DMX control

Flicker Free

92
CRI

S40T

- 40W LED profile spot zoom
- 2700K - 6000K CCT
- High CRI of 92
- Aluminum housing, fan-free
- 15° - 30° manual zoom lens
- Black or white body
- Track mount version opt.

2700K - 6000K

DMX
DMX control

Flicker Free

92
CRI

Honor 200 Zoom


- 200W white LED profile spot
- 3200K or 5600K opt.
- 18° - 38° manual zoom
- Bright output
- High CRI 97, TLCI 98
- Dimmer curves, frequency
- Smart fan, silent

COB
200W LED

DMX
DMX control

Zoom

98
CRI

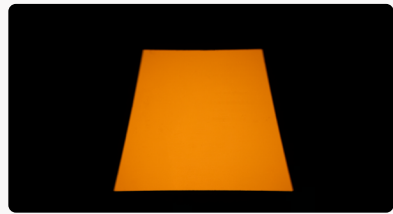

Honor 250C Zoom

- 250W RGBW LED profile spot
- RGBW color mixing
- 18° - 38° manual zoom
- 3000K - 8000K CCT
- Dimmer frequency
- Dimmer curves
- Smart fan, silent



Honor 300 Zoom

- 300W white LED profile spot
- 3200K or 5600K opt.
- 18° - 38° manual zoom
- 1KW tungsten equivalent
- High CRI 97, TLCI 98
- Dimmer curves, frequency
- Smart fan, silent



CTC 300 Profile

- 300W dual white LED profile
- 2800K - 6500K CCT
- 18° - 38° manual zoom
- HD optics
- High CRI 96, TLCI 98
- Dimmer curves, frequency
- Smart fan, silent operation



Honor 350C Zoom

- 350W RGBALC LED profile
- RGBALC color mixing
- High CRI 95, TLCI 98
- 18° - 38° manual zoom
- 2700K - 8000K CCT
- Dimmer curves, frequency
- Smart fan, silent





Scan for details




Scan for details



Scan for details



Scan for details

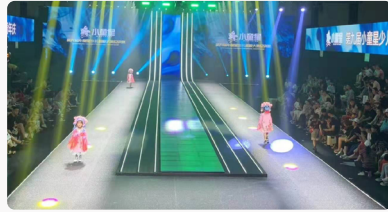

Profile S250C

- 250W RGBW LED profile spot
- RGBW color mixing
- 19°, 26°, 36°, 50° lens opt.
- 3000K - 8000K CCT
- Dimmer frequency
- Dimmer curves
- Smart fan, silent

COB
250W LED



Profile S300

- 300W white LED profile spot
- 3200K or 5600K opt.
- 19°, 26°, 36°, 50° lens opt.
- 1KW tungsten equivalent
- High CRI 97, TLCI 98
- Dimmer curves, frequency
- Smart fan, silent

COB
300W LED



98
TLCI

Profile S300T

- 300W dual white LED profile
- 2800K - 6500K CCT
- 19°, 26°, 36°, 50° lens opt.
- HD optics
- High CRI 96, TLCI 98
- Dimmer curves, frequency
- Smart fan, silent operation

COB
300W LED





Profile S350C

- 350W RGBALC LED profile
- RGBALC color mixing
- High CRI 95, TLCI 98
- 19°, 26°, 36°, 50° lens opt.
- 2700K - 8000K CCT
- Dimmer curves, frequency
- Smart fan, silent

COB
350W LED



95
CRI

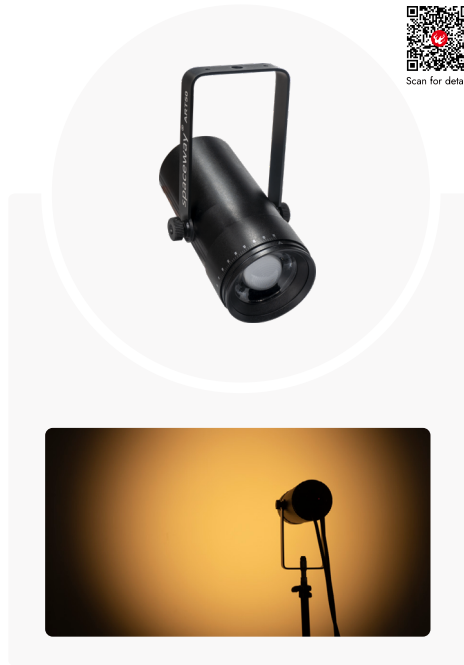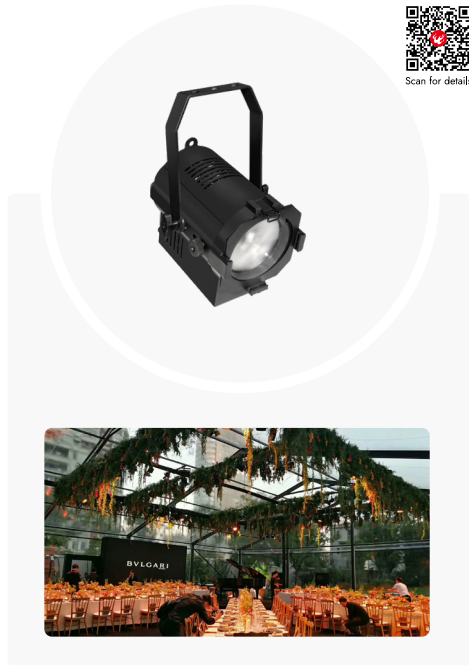

Mini Fresnel 40Z

- 40W fresnel single white
- CRI 95, R9≥90, TLCI 98
- 25° - 80° manual zoom
- Smooth dimming
- Super compact, easy for set up
- Rotary, key, DMX control
- 4-leaf rotatable barndoor



Mini Fresnel 50T

- 50W fresnel tunable white
- 2700K - 6500K CCT
- CRI 95, R9≥90, TLCI 98
- 25° - 80° manual zoom
- Super compact, easy for set up
- Rotary, key, DMX control
- 4-leaf rotatable barndoor



Mini Fresnel 40C

- 40W LED fresnel zoom
- RGBW color mixing
- 40Watt for each color
- 25° - 80° manual zoom
- Super compact, easy for set up
- Rotary, key, DMX control
- 4-leaf rotatable barndoor



Art 50 Wash

- 40W LED fresnel zoom
- 2700K - 6000K CCT
- 10° - 60° manual zoom
- High CRI over 92
- Aluminum housing
- black or white body
- DMX, RDM support



New



Event 100T

- 100Watt tunable white fresnel
- 2700K - 6000K CCT
- 25° - 65° manual zoom
- Average CRI 95, TLCI 97
- Super compact size
- Barndoor included
- Rotary control dimmer, CCT



95
CRI

97
TLCI

New



Event 200T

- 200Watt tunable white fresnel
- 2700K - 6000K CCT
- 25° - 65° manual zoom
- Average CRI 95, TLCI 97
- Super compact size
- Barndoor included
- Rotary control dimmer, CCT



95
CRI

97
TLCI




Pioneer 100 Zoom

- 100W fresnel single white
- 3200K or 5600K CCT
- CRI 97, R9≥90, TLCI 98
- 25° - 65° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Barndoor included



97
CRI

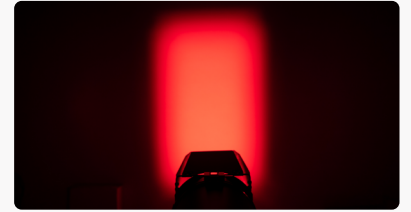

Pioneer 100C Zoom

- 100W LED fresnel RGBW
- RGBW color mixing
- Soft and even wash effect
- 25° - 65° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Barndoor included





Pioneer 100T Zoom

- 100W fresnel single white
- 2700K - 6000K CCT
- CRI 97, R9≥90, TLCI 98
- 25° - 65° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Barndoor included



Pioneer 200 Zoom

- 200W fresnel single white
- 3200K or 5600K CCT
- CRI 97, R9≥90, TLCI 98
- 15° - 60° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Barndoor included



Pioneer 200C Zoom


- 200W LED fresnel RGBW
- RGBW color mixing
- Soft and even wash effect
- 15° - 60° motorized zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Barndoor included



Pioneer 200T Pro

- 200W LED fresnel tunable white
- Smaller but brighter than Pioneer 200
- 2700K - 6500K CCT
- Average CRI 97, TLCI 98
- Soft and even wash effect
- 10 - 55° motorized zoom



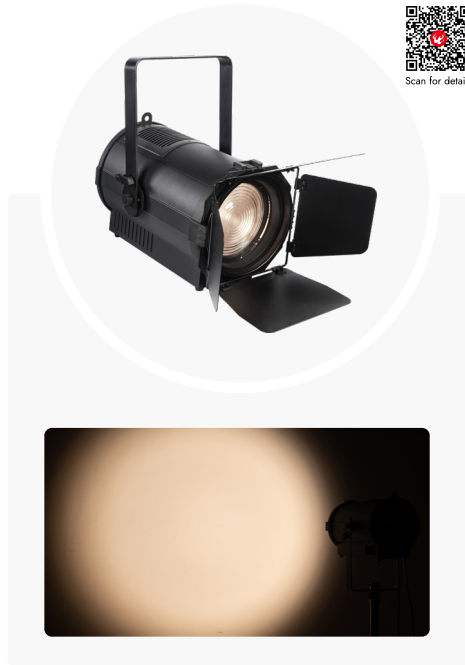

Pioneer 200C Pro

- 200W LED fresnel RGBALC
- RGBALC color mixing
- Soft and even wash effect
- CRI≥95(CT channel), 85(full on)
- Soft and even wash effect
- 10 - 55° motorized zoom
- Video flicker free



Pioneer 300 Zoom

- 300W LED fresnel single white
- 3200K or 5600K CCT
- CRI 97, R9≥90, TLCI 98
- 8° - 60° motorized zoom
- 3 + 5pin DMX, RDM support
- Super bright output
- Barndoor included



CTC 300 Fresnel

- 300W LED fresnel tunable white
- 2800K - 6500K CCT
- Soft and even wash effect
- High CRI 98, TLCI 98
- Soft and even wash effect
- 8° - 60° motorized zoom
- Video flicker free



Pioneer 350C Zoom

- 350W LED fresnel RGBALC
- RGBALC color mixing
- Soft and even wash effect
- High CRI 95, TLCI 98
- Soft and even wash effect
- 20 - 55° motorized zoom
- Video flicker free





Scan for details



Scan for video



Scan for details



Scan for video



Scan for details



Scan for video



Scan for details



Scan for video

Solar Panel 150T

- 150Watt LED studio panel
- 3200K - 5600K CCT
- Super bright, uniform coverage
- Super silent operation
- High CRI 98, TLCI 98
- Rotary, DMX, RDM control
- 8 - leaf barn door



8-leaf barn door



3200K - 5600K



Flicker Free



98
TLCI

Solar Panel 200

- 200Watt LED studio panel
- 3200K or 5600K color temp
- Super bright, uniform coverage
- Super silent operation
- High CRI 95, TLCI 98
- Rotary, DMX, RDM control
- 8 - leaf barn door



8-leaf barn door



3200K or 5600K



Flicker Free



98
TLCI

Solar Panel 300T

- 300Watt LED studio panel
- 3200K - 5600K CCT
- Super bright, uniform coverage
- Super silent operation
- High CRI 98, TLCI 98
- Rotary, DMX, RDM control
- 8 - leaf barn door



COB
300W LED



2800K - 6500K



Zoom



Flicker Free

Solar Panel 300C

- 300W LED studio panel RGBWW
- 2800K - 8000K CCT
- Uniform coverage
- Turbo mode available
- High CRI 95, TLCI 98
- Rotary, DMX, RDM control
- 8 - leaf barn door



8-leaf barn door



RGBWW




2800K - 8000K



98
TLCI



Scan for details

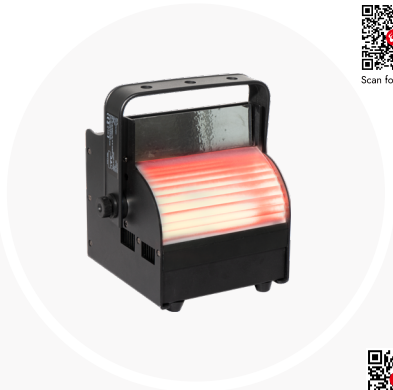

Scan for details



New



Scan for details



New



Scan for details



Scan for video



Solar CYC

- 175Watt LED cyclorama
- 3200K or 5600K color temp
- Super bright, uniform coverage
- CRI 98, R9≥93, TLCI 98
- Flicker free operation
- PWM 1.2 - 20 KHz
- Super silent operation



98
TLCI

CYC RGBW

- 175Watt LED cyclorama
- RGBW color mixing
- Super bright, uniform coverage
- DMX RDM protocols
- Flicker free operation
- PWM 1.2 - 20 KHz
- Super silent operation



2.7
Compact

Atmos 100T

- 100W dual white down light
- 150W optional
- 2700K - 6900K CCT
- Uniform coverage
- Fan-free design
- High CRI 96, TLCI 98
- Dimmer curves selectable
- Smooth dimming, flicker free
- Downlight or fresnel



98
TLCI



Atmos 150C

- 150W RGBAL down light
- RGBW optional
- Uniform coverage
- Fan-free design
- Aluminum housing
- Dimmer curves selectable
- Smooth dimming, flicker free
- Downlight or fresnel



New



Scan for details



Chinlite 5600

- LED chin light
- 5600K color temperature
- High CRI, TLCI, CQS
- Beehive diffuser available
- 0 - 100% smooth dimming
- 1 controller control 4 lights
- DMX, manual control



Scan for details




Par Master X1

- 150Watt fresnel zoom par
- 3200K or 5600K color temp.
- CRI 96, TLCI 98
- 25° - 80° manual zoom
- Flicker free
- DMX, RDM control
- Rotating barndoor included



Scan for details

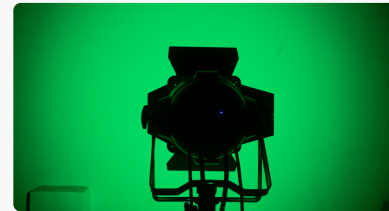





Par Master C1

- 150Watt fresnel zoom par
- RGBW color mixing
- Flat and even color mixing
- 25° - 80° manual zoom
- Smooth dimming, flicker free
- DMX, RDM control
- Rotating barndoor included




Blinder 400

- 4 x 100W LED, high brightness
- Individual control of each LED
- 3200K - 5600K tunable, single white optional
- Flicker free
- Aluminum housing
- 2 eye blinder available

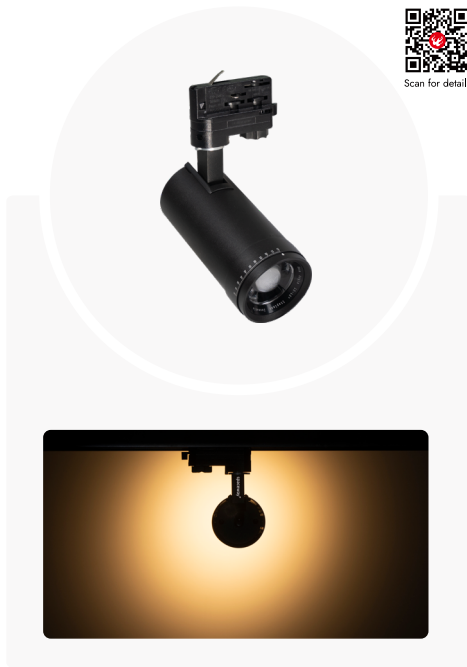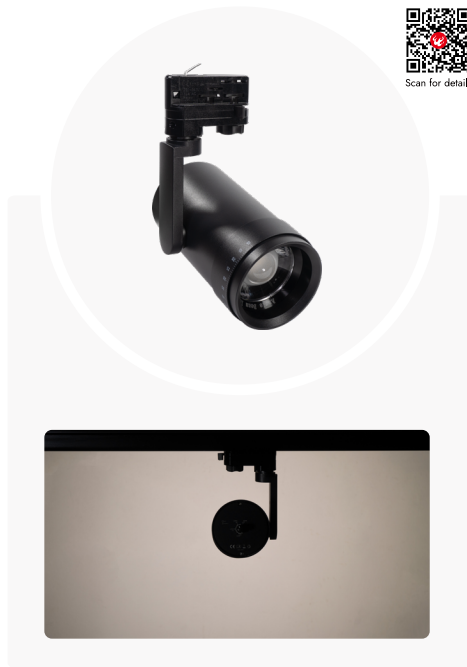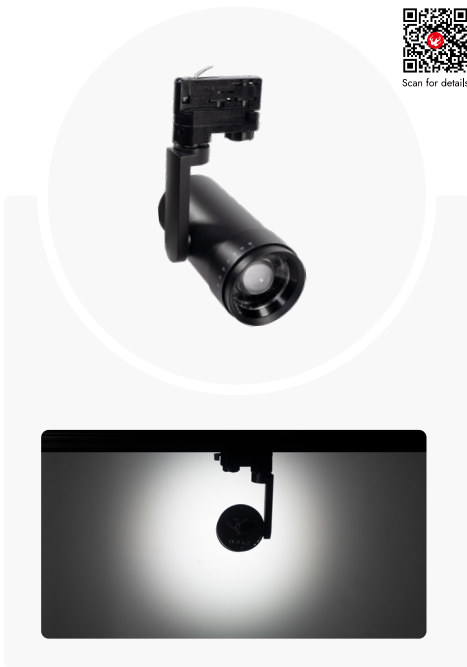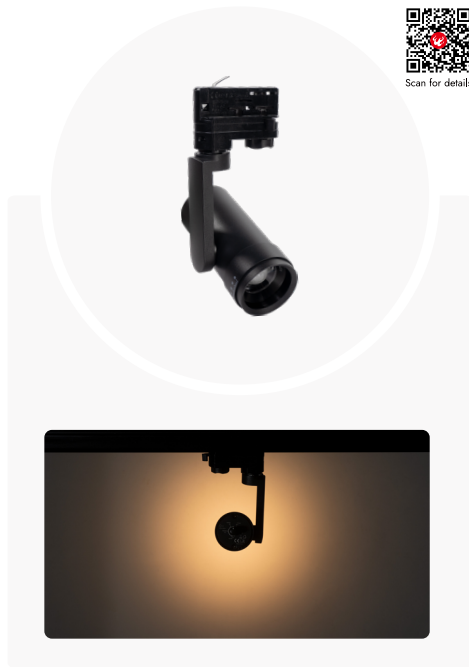

Showgun 10

- 10W LED track spot light
- 2700K - 6000K CCT
- High CRI of 96
- Aluminum housing, fan-free
- 10° - 60° manual zoom
- 4 wire track adapter
- Black or white body



Showgun 20

- 20W LED track spot light
- 2700K - 6000K CCT
- High CRI of 96
- Aluminum housing, fan-free
- 10° - 60° manual zoom
- 4 wire track adapter
- Black or white body



Showgun 35




- 35W LED track spot light
- 2700K - 6000K CCT
- High CRI of 96
- Aluminum housing, fan-free
- 10° - 60° manual zoom
- 4 wire track adapter
- Black or white body




Spacegun 10

- 10W LED track spot light
- 2700K - 6000K CCT
- High CRI of 96
- Aluminum housing, fan-free
- 10° - 60° manual zoom
- 4 wire track adapter
- Black or white body



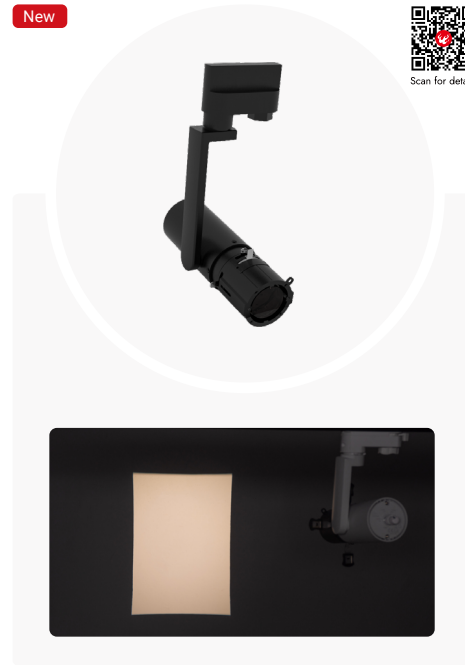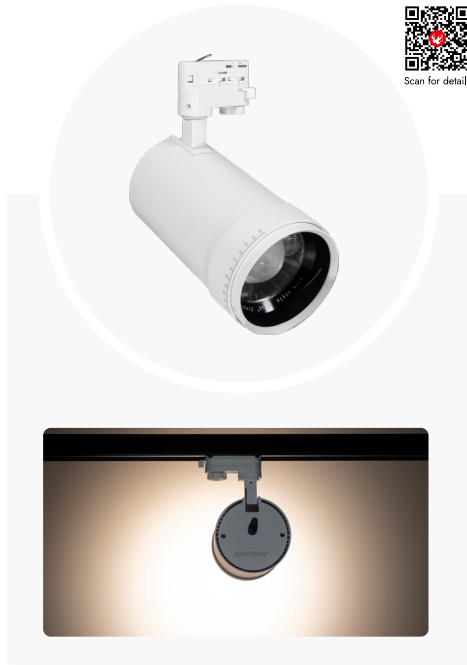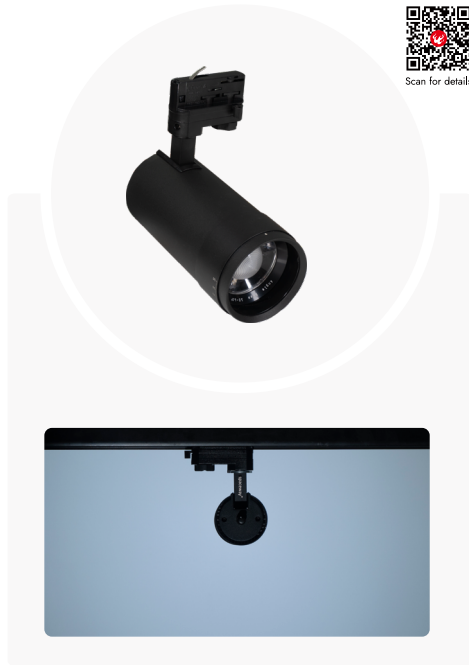

New

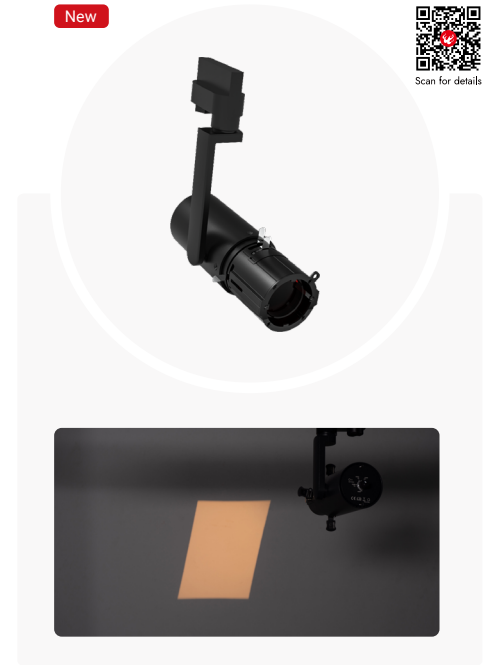


New



Spacegun 20

- 20W LED track spot light
- 2700K - 6000K CCT
- High CRI of 96
- Aluminum housing, fan-free
- 10° - 60° manual zoom
- 4 wire track adapter
- Black or white body



Spacegun 35

- 35W LED track spot light
- 2700K - 6000K CCT
- High CRI of 96
- Aluminum housing, fan-free
- 10° - 60° manual zoom
- 4 wire track adapter
- Black or white body



Showgun Spot 10

- 10W LED track framing light
- 2700K - 6000K CCT
- High CRI of 96
- 4 shutters control light shape
- 25° fixed lens
- 4 wire track adapter
- Black or white body



Showgun Spot 20


- 20W LED track framing light
- 2700K - 6000K CCT
- High CRI of 96
- 4 shutters control light shape
- 30° fixed lens
- 4 wire track adapter
- Black or white body



New



Scan for details

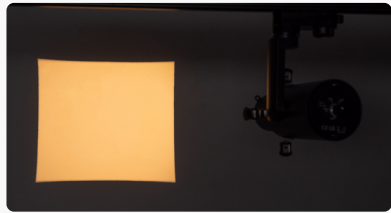

Showgun Spot 35

- 35W LED track framing light
- 2700K - 6000K CCT
- High CRI of 96
- 4 shutters control light shape
- 30° fixed lens
- 4 wire track adapter
- Black or white body

COB
35W LED

2700K - 6000K

Flicker Free

Track
3 circuits

New



Scan for details



Spacegun Spot 2035

- 10W white framing track
- 4 shuttuers for framing
- Camera lens style zoom
- 3000K, 4000K or 5600K
- High CRI of 95
- 20° - 35° zoom lens
- Black or white body

COB
10W LED

Fan-free


Zoom

Track
3 circuits

New



Scan for details

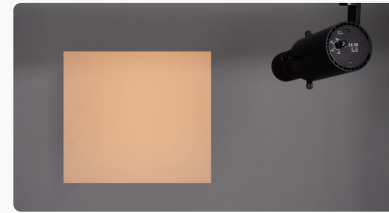

Showgun Spot 2035

- 20W dual white framing track
- 4 shuttuers for framing
- Camera lens style zoom
- 2700K - 6000K CCT
- High CRI of 95
- 20° - 35° zoom lens
- Black or white body

COB
20W LED

2700K - 6000K


Zoom

Track
3 circuits

New



Scan for details

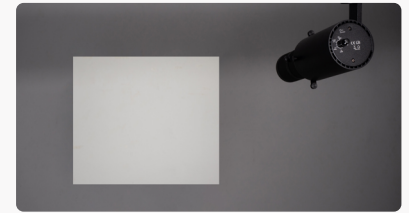

Showgun Spot 2540

- 30W dual white framing track
- 4 shuttuers for framing
- Camera lens style zoom
- 2700K - 6000K CCT
- High CRI of 95
- 25° - 40° zoom lens
- Black or white body

COB
30W LED

2700K - 6000K

Zoom

Track
3 circuits

New




Showgun Spot 5060

- 35W dual white framing track
- 4 shuttuers for framing
- Camera lens style zoom
- 2700K - 6000K CCT
- High CRI of 95
- 50° - 60° zoom lens
- Black or white body




New

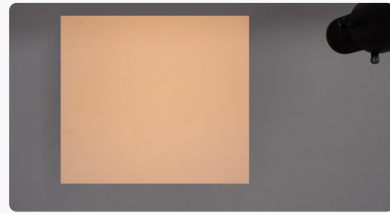

Gallery 50 Spot

- 40W LED profile spot zoom
- 2700K - 6000K CCT
- Single white / RGBW optional
- 25° - 40°, 50° - 60° manual zoom
- High CRI over 92
- Four shutters control light shape
- black or white body
- DMX, RDM support



Hero 300 Super Beam

- 80W LED moving head beam
- Super bright optical system
- 2 degree beam angle
- 1 Color wheel with 10 colors+open
- 1 Gobo wheel with 13 fixed gobo+open
- 1 effect color wheel




Hero 300 Spot

- 200W LED moving head spot
- 7° - 20° motorzied zoom
- 1 Color wheel with 9 colors + open
- 1 Gobo wheel with 9 fixed gobo + open
- 1 Gobo wheel with 7 rotating gobo + open
- 3 facet circular rotating indexable prism



Hero 300 Performance

- 300W LED moving head performance
- Spot, Wash, Animation effect all-in-one
- 1 Animation wheel, 3 - facet prism
- 1 Color wheel with 7 colors + open
- 1 Gobo wheel with 8 fixed gobo + open
- 1 Gobo wheel with 7 rotating gobo + open

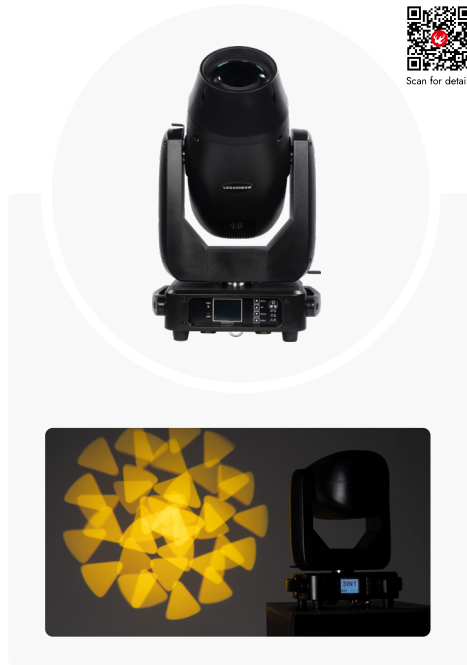


Hero 400 BSW

- 400W LED moving head Beam Sport Wash
- 4° - 35° moto zoom (spot mode)
- 1 color wheel with 8 colors
- 1 static gobo wheel with 12 gobos
- 1 rotating gobo wheel with 7 gobos
- 1 animation wheel
- CMY + CTO...



Hero 400 Framing

- 400Watt LED moving head framing
- 6000K LED
- CRI, TLCI up to 95
- 1 color wheel with 6 colors + CTO
- Auto framing
- Motorized zoom
- Double frost effect (Heavy frost + light frost)

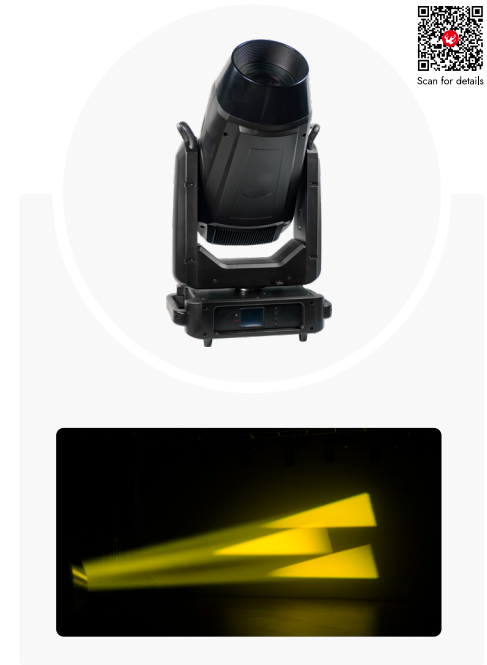

Hero 700 Framing


- 700Watt LED moving head framing
- 1 rotating gobo wheel with 7 rotating gobos
- 1 fixed gobo wheel with 15 gobos, variable speed jitter/bidirectional rotation
- 1 dynamic fire plate, reversible and 360 degree infinite rotation
- 5.5° - 50° linear high-speed zoom



Scan for details



Scan for video

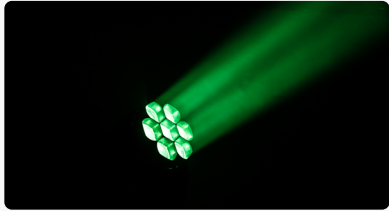

Mainforce 740

- 7 x 40W RGBW LED moving head beam wash
- 5° - 50° motorized zoom
- Accurate positioning, auto correction
- Compact body, light weight
- PowerCon in & out connection
- Available in pixel and non pixel control



Scan for details



Scan for video



Mainforce 1240

- 12 x 40W RGBW LED moving head beam wash
- Color macros function
- LED rainbow effect
- Strong beam effect, flat and nice wash effect
- Individual control of each LED
- 8° - 50° motorized zoom
- Super fast head moving



Scan for details



C19

- 19 x 15Watt RGBW LED beam wash
- Flat and even RGBW color mixing
- Motorized zoom 8° - 50°
- DMX, Auto, Master-slave, Sound control
- Pan 540°, Tilt 270°, accurate positioning
- Rapid pan & tilt movement
- 10/15/21/37 DMX channels



Scan for details



B19

- 19 x 15Watt LED beam, wash and kaleido effects
- Individual control of each LEDs, honeycomb designed lens
- Rotating front lens without limitation for vortex effects
- Operating modes: wash, beam, FX effects
- Motorized zoom range from 4° - 60°
- Powercon in & out



Scan for details



Mainforce 1940

- 19 x 40W LED moving beam wash
- RGBW 4in1 color mixing
- Individual control of each LEDs
- 4° - 60° moto zoom
- Rotating front lens without limitation for vortex effects
- Operating modes: wash, beam, FX effects



Scan for details



P19

- 19 x 15W LED zoom par
- RGBW LED color mixing
- Motorized zoom from 15° - 60°
- 3 separate LED zones controllable
- Auto, master-slave, sound activate
- 5/10/16/32 DMX channels
- Powercon in & out connection



Scan for details



POP 1018

- 18 x 10W LED par light
- RGBWA+UV 6 in 1 color mixing
- Various built-in color marcos
- DMX, auto, sound control
- Master-slave operation
- Aluminum housing
- RGBW or RGBWA version selectable



Scan for details



POP 354

- 54 x 3W LED par light
- RGBW(12R, 18G, 18B, 6W) LED
- Master-slave operation
- Aluminum housing
- Overheat protection
- IP 20 indoor use
- Built-in color marcos



Scan for details




EXT 1218

- 18 x 12W LED par IP rated
- RGBW 4in1 color mixing
- Master-slave operation
- 25°, 45° lens optional
- Overheat protection
- Built-in color Marcos
- IP65 rated, outdoor use



Scan for details

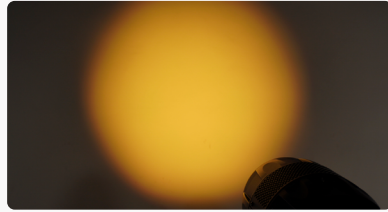


P740 (EXT 740)

- 7 x 40W RGBW LED zoom par IP rated
- High efficient optical lens
- Strong beam effect, flat and nice wash effect
- 5° - 45° motorized zoom range
- IP rated powerCon in & out connectors
- Die-casting aluminium body, compact design
- IP 65 rated, outdoor use



Scan for details

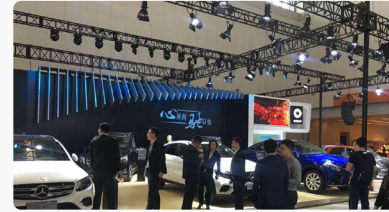

Power par 350

- 31 x 10W LED power par
- Super bright output, designed for auto show
- Long distance throw
- Video flicker free
- HQ LEDs, long life time
- Die-cast aluminum body
- Available in tunable white or RGBW version



Scan for details



Pop Par 100 UV

- 100W UV par light
- 100° wide beam angle
- Master-slave operation
- Aluminum housing
- Anti-corrosive coating
- Overheat protection
- RDM function



Scan for details



Scan for details



Scan for details



Scan for details



Strobe 1000 RGB

- 200W RGB LED strobe
- 1000 pcs SMD LEDs
- Even color mixing, bright output
- Strobe, Blinder, Wash all in one
- Aluminum housing
- Segment control

Strom 3000 RGBW


- LED strobe light IP rated
- Strobe, Blinder, Wash all in one
- 1320pcs RGBW 4in1 LED
- DMX, Auto, Sound control
- 1-30 times/second strobe
- Segment control

Batt Par Q6


- 6pcs RGBWA-UV LED battery par
- Compact, easy for set up
- Onboard 2.4G wireless DMX
- App available in IOS and Android phone
- IR control available
- Rechargeable, Li-ion battery
- Black and white housing selectable

Spark C600

- 600Watt cold spark machine
- Light weight only 4.9kg
- Safe, no gunpowder and smoke
- DMX 512, remote control
- Easy to setup and install
- Aluminum housing
- PowerCon in & out

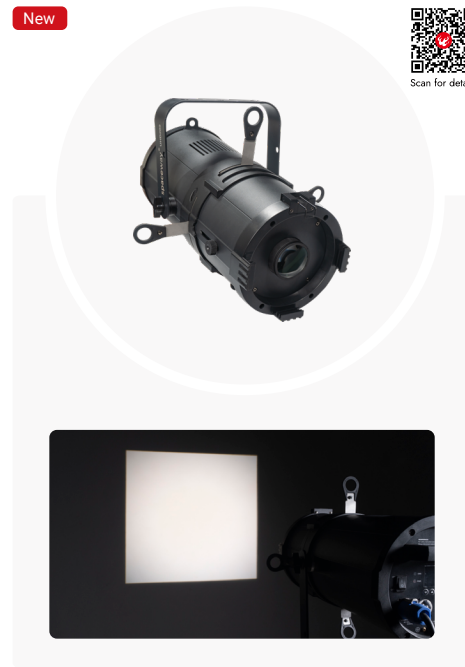

New

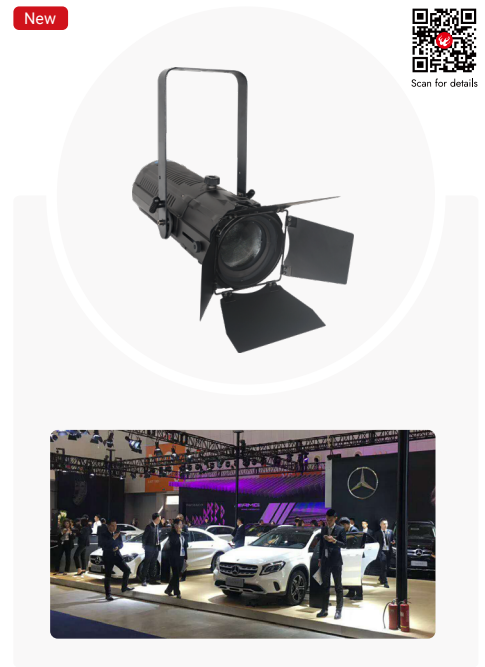

New



RDM DMX SP8

- 8 optically isolated XLR(Neutrik) plugs for DMX output
- 2 Neutrik XLR (3-pin) for DMX input
- Variable data routing capabilities for all DMX outputs
- Serial connection possible
- LED indication for functions
- DMX Splitter / DMX booster operation possible
- DMX / RDM protocol...

ArtNet DMX AD8

- RJ45 Ethernet (LAN) interface, 10/100M/1000M self-adaptive, support TCP/IP protocol
- Network interface supports port auto-inversion (Auto MDI/MDIX)
- Support DMX-512 and ArtNet protocol, rdm protocol
- Support ArtNet to DMX signal bi-directional conversion
- DMX input / output can be enabled / disabled
- Each DMX output port can be set to single, zero, HTP, LTPRDM five modes...

UHD 200

- 200W dual white LED profile
- 2800K - 6500K CCT
- 30° or 60° fixed lens
- UHD optics, no lens distortion
- Gobo holder available
- Dimmer curves, frequency
- 300W version optional



Apex 400

- 400W par light for car show
- 7500K color temperature
- High brightness
- Manual zoom
- Long distance throw
- Barndoor to shape light
- Compact size
- Easy to carry and install



New



Scan for details



Reborn 200C

- S4 LED retrofit colored
- RGBV or RGBA version
- RGBA color mixing
- 150Watt power
- 100 - 240V support
- XLR signal connection
- Easy to setup and install
- Flicker free



LED technology



LCD display



Flicker Free



DMX control

New



Scan for details



Reborn 200 Par

- Par light for Reborn 200
- Replacement for S4 par
- Single white or dual white optional
- High CRI
- Fixed angle
- Compact size



LED technology









LCD display



Flicker Free



DMX control

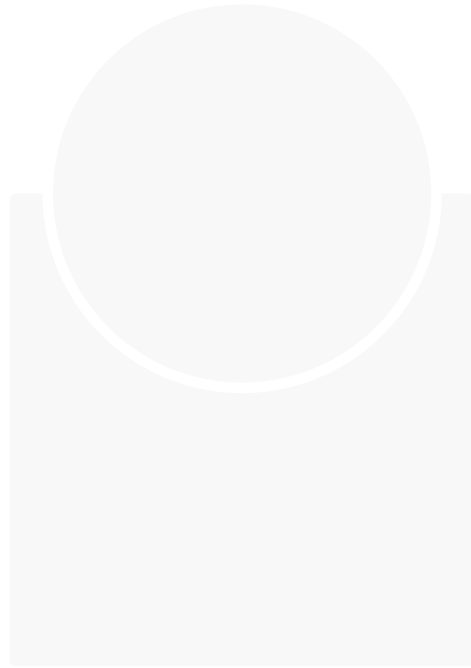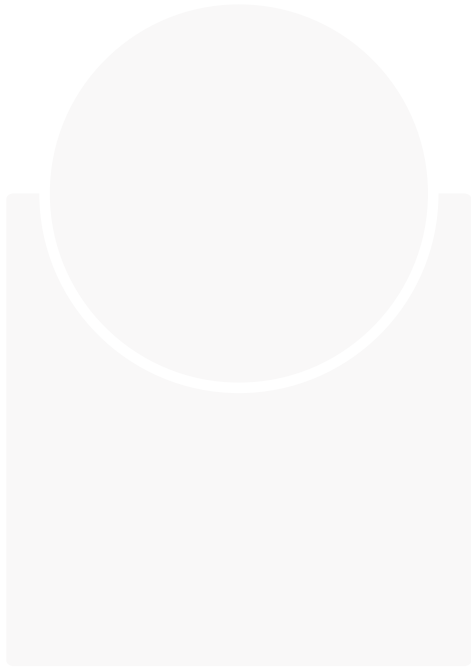

用心造好灯

Professional theatre, studio, gallery lights manufacture

Hotion® **Ovation®**



Download latest catalog

Stay Social !



Instagram
@ovationlight



Twitter
@ovationlight



Facebook
@ovationlighting



Youtube

Guangzhou Hotion Technology Co., Ltd

Building 29, Meidong Industrial Park, Huadu District, Guangzhou, China (510880)

T: +86 020 86847336 | E: info@hotion.com | www.hotion.com

© Copyright by Hotion. All rights reserved.

All specifications are subject to change without prior notice. V6